



Aalborg Universitet

AALBORG UNIVERSITY
DENMARK

Stochastic Finite Elements in Reliability-Based Structural Optimization

Sørensen, John Dalsgaard; Englund, S.

Publication date:
1995

Document Version
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

Citation for published version (APA):
Sørensen, J. D., & Englund, S. (1995). *Stochastic Finite Elements in Reliability-Based Structural Optimization*. Dept. of Building Technology and Structural Engineering. Structural Reliability Theory Vol. R9543 No. 155

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

INSTITUTTET FOR BYGNINGSTEKNIK

DEPT. OF BUILDING TECHNOLOGY AND STRUCTURAL ENGINEERING
AALBORG UNIVERSITET • AUC • AALBORG • DANMARK

STRUCTURAL RELIABILITY THEORY
PAPER NO. 155

Presented at WCSMO-95, Goslar, Germany 1995

J. D. SØRENSEN & S. ENGELUND
STOCHASTIC FINITE ELEMENTS IN RELIABILITY-BASED STRUCTURAL OPTIMIZATION
DECEMBER 1995

ISSN 1395-7953 R9543

The STRUCTURAL RELIABILITY THEORY papers are issued for early dissemination of research results from the Structural Reliability Group at the Department of Building Technology and Structural Engineering, University of Aalborg. These papers are generally submitted to scientific meetings, conferences or journals and should therefore not be widely distributed. Whenever possible reference should be given to the final publications (proceedings, journals, etc.) and not to the Structural Reliability Theory papers.

INSTITUTTET FOR BYGNINGSTEKNIK
DEPT. OF BUILDING TECHNOLOGY AND STRUCTURAL ENGINEERING
AALBORG UNIVERSITET • AUC • AALBORG • DANMARK

STRUCTURAL RELIABILITY THEORY
PAPER NO. 155

Presented at WCSMO-95, Goslar, Germany 1995

J. D. SØRENSEN & S. ENGELUND
STOCHASTIC FINITE ELEMENTS IN RELIABILITY-BASED STRUCTU-
RAL OPTIMIZATION
DECEMBER 1995

ISSN 1395-7953 R9543

STOCHASTIC FINITE ELEMENTS IN RELIABILITY-BASED STRUCTURAL OPTIMIZATION

J.D. Sørensen and S. Englund

Department of Building Technology and Structural Engineering
Aalborg University, Sohngaardsholmsvej 57
DK-9000 Aalborg, Denmark

ABSTRACT

Application of stochastic finite elements in structural optimization is considered. It is shown how stochastic fields modelling e.g. the modulus of elasticity can be discretized in stochastic variables and how a sensitivity analysis of the reliability of a structural system with respect to optimization variables can be performed. A computer implementation is described and an illustrative example is given.

Key Words: Reliability analysis; Stochastic finite elements; Structural optimization; Stochastic fields.

1. INTRODUCTION

The development of effective First Order Reliability Methods (FORM), see (Madsen et al., 1986) and optimization algorithms in combination with sensitivity analysis methods has implied that a large number of decision problems in structural engineering can now be solved with a reasonable amount of resources. Examples are optimal reliability-based design, inspection and maintenance planning with respect to cracks in steel structures and optimal reliability-based experiment planning. These decision problems can be solved on the basis of classical decision theory using Bayesian statistics, see e.g. (Sørensen et al., 1995) and (Kroon et al., 1995).

Uncertain quantities are generally modelled by stochastic variables and the reliability is estimated using FORM. However, uncertainties related to structural material characteristics in general have to be modelled by stochastic fields. Using stochastic finite elements the stochastic fields can be discretized. In relation to optimization of structural systems the discretized stochastic fields have until now been characterized in an approximate way by stochastic variables related to the midpoint or the average value of the stochastic field in a given stochastic finite element discretization, see (Brenner, 1991) and (Der Kiureghian et al., 1988). However, a newly developed method, see e.g. (Deodatis, 1991), makes it possible to formulate 'exact' stochastic stiffness matrices by the so-called weighted integral method.

The purpose of the present paper is to demonstrate how reliability-based optimization problems involving random spatial fluctuations of material properties can be solved

using FORM analysis and weighted integrals in stochastic finite elements.

The solution of this optimization problem can be divided into four main tasks, namely (stochastic) finite element analyses, sensitivity analyses, reliability analyses and application of an optimization algorithm. It is discussed how these four tasks can be linked effectively, especially the implementation of stochastic finite elements in such a system is considered. The suggested methodology is demonstrated by an illustrative example.

2. RELIABILITY-BASED STRUCTURAL OPTIMIZATION

As described in (Enevoldsen et al., 1994) an optimization (design) problem in *reliability-based structural optimization* can be formulated by

$$\min C(\mathbf{b}) \quad (1)$$

$$s.t. \quad \beta_i(\mathbf{b}) \geq \beta_i^{\min}, \quad i = 1, \dots, M \quad (2)$$

$$B_i(\mathbf{b}) \geq 0, \quad i = 1, \dots, m \quad (3)$$

$$b_i^l \leq b_i \leq b_i^u, \quad i = 1, \dots, N \quad (4)$$

where $\mathbf{b} = (b_1, \dots, b_N)$ are the design/optimization variables. The optimization variables are assumed to be related to size and shape parameters. The objective function C is often chosen as the structural weight.

The constraints in (2) are related to the reliability of single elements of the structural system. $\beta_i, i = 1, \dots, M$ are reliability indices for M failure modes. $\beta_i^{\min}, i = 1, \dots, M$ are the corresponding lower limits on the reliabilities. The deterministic inequality constraints in (3) ensure that response characteristics such as displacements and stresses do not exceed codified critical values. The inequality constraints can also include general design requirements for the design variables. The constraints in (4) are simple bounds.

Alternatively, the optimization problem (1) - (4) can be formulated as a *system reliability-based optimization* problem if the constraint (2) is exchanged with a constraint on the system reliability index β^s estimated on the basis of the M failure modes in (2). Further, a more general optimization problem can be formulated if the objective function in (1) is exchanged with the total expected costs in the design lifetime, see (Sørensen et al., 1994).

The reliability indices in (2) are assumed to be determined on the basis of limit state functions which can be written

$$g_i(\mathbf{b}, \mathbf{x}(\mathbf{b}), \mathbf{y}(\mathbf{b}, \mathbf{x}(\mathbf{b}))) = 0 \quad i = 1, \dots, M \quad (5)$$

where \mathbf{x} are realizations of stochastic variables \mathbf{X} . Realizations \mathbf{x} where $g \leq 0$ corresponds to failure states, while realizations \mathbf{x} where $g > 0$ corresponds to safe states. \mathbf{y} are performances such as displacements and stresses.

The stochastic variables \mathbf{X} can depend on the optimization variables \mathbf{b} , for example if the expected value μ_{X_i} of X_i or the standard deviation σ_{X_i} of X_i are related to an optimization variable by e.g. $b_j = \mu_{X_i}$.

The deterministic constraints in (3) are assumed to be related to the limit state functions g_i by

$$B_i = g_i(\mathbf{b}, \mathbf{x}^d(\mathbf{b}), \mathbf{y}(\mathbf{b}, \mathbf{x}^d(\mathbf{b}))) \quad i = 1, \dots, m \quad (6)$$

where \mathbf{x}^d are design values calculated from, e.g. $x_j^d = \gamma_j(\mu_{X_j} + k_j \sigma_{X_j})$, where k_j is a factor defining the characteristic value and γ_j is a partial safety factor.

3. STOCHASTIC FINITE ELEMENTS

If the properties of the structural elements are uncertain and depend on the spatial coordinates then they have to be modelled by stochastic fields. In the following it is shown how stochastic fields can be discretized in combination with structural finite elements,

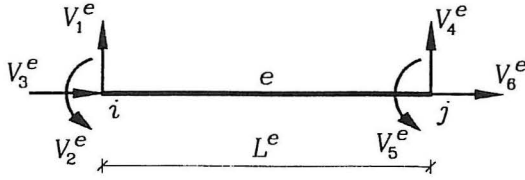


Figure 1. Two-dimensional beam element.

As an example a structural system modelled by two-dimensional beam elements is considered. The presentation in this section can easily be extended to truss and three-dimensional beam elements. Element e has the length L^e , the displacement vector is denoted $\mathbf{v}^e = (v_1^e, \dots, v_6^e)$ and the corresponding nodal forces $\mathbf{p} = (Q_i^e, M_i^e, N_i^e, Q_j^e, M_j^e, N_j^e)$, see figure 1.

Based on the flexibility method of structural analysis the local stiffness matrix \mathbf{k}^e for element e can be obtained from

$$\mathbf{k}^e = \mathbf{H}^e \mathbf{F}^{e^{-1}} \mathbf{H}^{e^T} \quad (7)$$

where \mathbf{H}^e is the compatibility matrix. The flexibility matrix \mathbf{F}^e is related to the internal

forces M_i^e, M_j^e and N_j^e by

$$\mathbf{F}^e = \begin{bmatrix} \int_0^{L^e} \frac{x-L^e}{L^e} \frac{x-L^e}{L^e} \frac{1}{I^e E^e(x)} dx & \int_0^{L^e} \frac{x}{L^e} \frac{x-L^e}{L^e} \frac{1}{I^e E^e(x)} dx & 0 \\ \int_0^{L^e} \frac{x}{L^e} \frac{x-L^e}{L^e} \frac{1}{I^e E^e(x)} dx & \int_0^{L^e} \frac{x}{L^e} \frac{x}{L^e} \frac{1}{I^e E^e(x)} dx & 0 \\ 0 & 0 & \int_0^{L^e} \frac{1}{A^e E^e(x)} dx \end{bmatrix} \quad (8)$$

where it is assumed that the moment of inertia I^e and the cross-sectional area A^e are constant in element e . E^e denotes the modulus of elasticity. It is assumed that E^e is uncertain and that it can be modelled by a stochastic field $\{E^e(x), x \in L_\Omega\}$ where L_Ω denotes the total length of all beam elements in the structure. The stochastic field $\{E^e(x)\}$ is modelled by

$$\frac{1}{E^e(x)} = \frac{1}{E_0^e} (1 + f_E(x)) \quad (9)$$

where E_0^e is the expected value of $\{E^e(x)\}$ and $\{f_E(x)\}$ is a homogeneous Gaussian stochastic field with zero mean and covariance function

$$C_{f_E}(x) = \int_{-\infty}^{\infty} S_{f_E}(\omega) e^{i\omega x} d\omega \quad (10)$$

$S_{f_E}(\omega)$ is the spectral density function of $\{f_E(x)\}$.

If (9) is introduced in (8) the flexibility matrix can be written

$$\mathbf{F}^e = \mathbf{F}_0^e + X_1^e \mathbf{F}_1^e + X_2^e \mathbf{F}_2^e + X_3^e \mathbf{F}_3^e \quad (11)$$

where X_1^e, X_2^e and X_3^e are zero mean normally distributed stochastic variables defined by

$$X_i^e = \int_0^{L^e} x^{i-1} f_E(x) dx \quad i = 1, 2, 3 \quad (12)$$

and

$$\begin{aligned} \mathbf{F}_0^e &= \begin{bmatrix} \frac{L^e}{3E_0^e I_0^e} & -\frac{L^e}{6E_0^e I_0^e} & 0 \\ -\frac{L^e}{6E_0^e I_0^e} & \frac{L^e}{3E_0^e I_0^e} & 0 \\ 0 & 0 & \frac{L^e}{E_0^e A^e} \end{bmatrix} & \mathbf{F}_1^e &= \begin{bmatrix} -\frac{1}{E_0^e I_0^e} & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & -\frac{1}{E_0^e A^e} \end{bmatrix} \\ \mathbf{F}_2^e &= \begin{bmatrix} \frac{2}{L^e E_0^e I_0^e} & \frac{1}{L^e E_0^e I_0^e} & 0 \\ \frac{1}{L^e E_0^e I_0^e} & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix} & \mathbf{F}_3^e &= \begin{bmatrix} -\frac{1}{L^e E_0^e I_0^e} & -\frac{1}{L^e E_0^e I_0^e} & 0 \\ -\frac{1}{L^e E_0^e I_0^e} & -\frac{1}{L^e E_0^e I_0^e} & 0 \\ 0 & 0 & 0 \end{bmatrix} \end{aligned} \quad (13)$$

If two stochastic variables X_i^e and X_j^e are related to the same finite element the covariances become

$$\text{Cov}[X_i^e, X_j^e] = \int_0^{L^e} \int_0^{L^e} x_1^{i-1} x_2^{j-1} C_{fE}(x_1 - x_2) dx_1 dx_2 \quad (14)$$

If X_i^e and X_j^e are related to finite elements in two different elements (14) can easily be generalized such that $\text{Cov}[X_i^e, X_j^e]$ can be estimated.

The global stiffness matrix \mathbf{K} is obtained from

$$\mathbf{K} = \sum_{e=1}^{N_e} \mathbf{T}^{eT} \mathbf{k}^e \mathbf{T}^e = \sum_{e=1}^{N_e} \mathbf{T}^{eT} \mathbf{H}^e \mathbf{F}^{e-1} \mathbf{H}^{eT} \mathbf{T}^e \quad (15)$$

where N_e is the number of finite elements and \mathbf{T}^e is the geometric transformation matrix from the local coordinates to global coordinates.

If \mathbf{P} denotes the global nodal load vector, the global displacements \mathbf{v} are obtained from the global finite element equations $\mathbf{K}\mathbf{v} = \mathbf{P}$. If distributed loads are applied then \mathbf{P} becomes dependent on the stochastic variables X_1^e, \dots, X_3^e , see (Deodatis, 1991).

The performances y_i in (5) are assumed to be either a displacement or a stress component in a finite element. Therefore, in general

$$y_i = y_i(\mathbf{b}, \mathbf{X}(\mathbf{b}), \mathbf{v}(\mathbf{b}, \mathbf{X}(\mathbf{b}))) \quad (16)$$

4. SENSITIVITY ANALYSIS

In First Order Reliability Methods (FORM) the generally correlated and non-normally distributed stochastic variables \mathbf{X} are transformed into standardized and normally distributed stochastic variables $\mathbf{U} = (U_1, U_2, \dots, U_n) : \mathbf{X} = \mathbf{T}(\mathbf{U}, \mathbf{b})$, see e.g. (Madsen et al., 1986). In the u -space the reliability index β is defined by

$$\min_{\mathbf{u}} \beta = (\mathbf{u}^T \mathbf{u})^{\frac{1}{2}} \quad (17)$$

$$s.t. \quad g(\mathbf{b}, \mathbf{x}(\mathbf{b}, \mathbf{u}), y_i(\mathbf{b}, \mathbf{X}(\mathbf{b}), \mathbf{v}(\mathbf{b}, \mathbf{X}(\mathbf{b})))) = 0 \quad (18)$$

The solution point \mathbf{u}^* is denoted the β -point. If the failure function is approximately linear the probability of failure P_f of the failure mode can be determined with good accuracy from $P_f \approx \Phi(-\beta)$ where Φ is the standard normal distribution function.

Gradients with respect to \mathbf{u}

In iteration algorithms used to solve the optimization problem (17) - (18) the gradient $\nabla_{\mathbf{u}}g$ of the failure function g with respect to u_1, \dots, u_n is needed. $\nabla_{\mathbf{u}}g$ is obtained from

$$\nabla_{\mathbf{u}}^T g = \nabla_{\mathbf{x}}^T g \mathbf{J}_{\mathbf{xu}} + \nabla_{\mathbf{y}}^T g \mathbf{J}_{\mathbf{yx}} \mathbf{J}_{\mathbf{xu}} \quad (19)$$

where T signifies the transpose and $\mathbf{J}_{\mathbf{xu}}$ and $\mathbf{J}_{\mathbf{yx}}$ indicate Jacobian matrices. $\nabla_{\mathbf{y}}g$, $\nabla_{\mathbf{x}}g$ and $\mathbf{J}_{\mathbf{xu}}$ can usually be estimated analytically or numerically without significant errors and with relatively low cost within reliability programmes. $\mathbf{J}_{\mathbf{yx}}$ can be obtained as described below.

Gradients with respect to \mathbf{b}

The reliability-based optimization problems in (1) - (4) can usually be solved using first order optimization algorithms, such as the NLPQL algorithm, see (Schittkowski, 1986). These methods require the gradient of objective function and of all constraints.

The gradients of the reliability indices β_i with respect to the design variables \mathbf{b} are obtained from, see (Madsen et al., 1986)

$$\nabla_{\mathbf{b}}^T \beta_i = \frac{1}{|\nabla_{\mathbf{u}} g_i|} [\nabla_{\mathbf{b}}^T g + \nabla_{\mathbf{x}}^T g \mathbf{J}_{\mathbf{xb}} + \nabla_{\mathbf{y}}^T g (\mathbf{J}_{\mathbf{yb}} + \mathbf{J}_{\mathbf{yx}} \mathbf{J}_{\mathbf{xb}} + \mathbf{J}_{\mathbf{yv}} (\mathbf{J}_{\mathbf{vb}} + \mathbf{J}_{\mathbf{vx}} \mathbf{J}_{\mathbf{xb}}))] \quad (20)$$

where the gradients $\nabla_{\mathbf{b}}^T g$, $\nabla_{\mathbf{x}}^T g$, $\nabla_{\mathbf{y}}^T g$ and the Jacobians $\mathbf{J}_{\mathbf{yb}}$, $\mathbf{J}_{\mathbf{yx}}$ and $\mathbf{J}_{\mathbf{yv}}$ can be estimated analytically or numerically without significant errors and with relatively low cost. The elements in $\mathbf{J}_{\mathbf{xb}}$ are determined as $\frac{\partial x_i}{\partial b_k} = \frac{\partial T_j(\mathbf{u}_i^*, \mathbf{b})}{\partial b_k}$, where \mathbf{u}_i^* is the β -point for the i th limit state function.

The Jacobians $\mathbf{J}_{\mathbf{vb}}$ and $\mathbf{J}_{\mathbf{vx}}$ can be obtained by quasi-analytical sensitivity analysis. If \mathbf{P} does not depend on \mathbf{b} then

$$\frac{d\mathbf{v}}{db_j} = -\mathbf{K}^{-1} \frac{d\mathbf{K}}{db_j} \mathbf{v} \quad (21)$$

For size design variables \mathbf{H}^e , X_1^e , X_2^e and X_3^e will not be dependent on \mathbf{b} . Therefore

$$\frac{d\mathbf{K}}{db_j} = - \sum_{e=1}^{N_e} \mathbf{T}^{eT} \mathbf{H}^e \mathbf{F}^{e-1} \left(\frac{d\mathbf{F}_0^e}{db_j} + x_1^e \frac{d\mathbf{F}_1^e}{db_j} + x_2^e \frac{d\mathbf{F}_2^e}{db_j} + x_3^e \frac{d\mathbf{F}_3^e}{db_j} \right) \mathbf{F}^{e-1} \mathbf{H}^{eT} \mathbf{T}^e \quad (22)$$

where $\frac{d\mathbf{F}_0^e}{db_j}$, $\frac{d\mathbf{F}_1^e}{db_j}$, $\frac{d\mathbf{F}_2^e}{db_j}$ and $\frac{d\mathbf{F}_3^e}{db_j}$ are obtained from (13). If e.g. $x_j = x_2^e$ then

$$\frac{d\mathbf{K}}{dx_j} = -\mathbf{T}^{eT} \mathbf{H}^e \mathbf{F}^{e-1} \mathbf{F}_2^e \mathbf{F}^{e-1} \mathbf{H}^{eT} \mathbf{T}^e \quad (23)$$

5. ALGORITHMS

The above sensitivity analysis is implemented in a computer programme which can be used to solve the design problem in (1)-(4). The computer programme consists of the following modules: • OPTI: A general optimization algorithm where the optimization problem in (1)-(4) is programmed, e.g. NLPQL, (Schittkowski, 1986). • RELI: A general reliability programme (e.g. PRADSS (Sørensen, 1991)) which calculates the reliability indices β and sensitivities $\frac{d\beta}{db_i}$. • GFUN: Limit state functions • STAT: Calculation of covariances of stochastic variables defined by (12). • FEM: A general linear finite element programme. • SFEM: modifies the local stiffness matrices in FEM according to realizations of \mathbf{X} and \mathbf{b} using (7) and (11). • SENS: evaluates the sensitivity coefficients in (20)-(23).

6. EXAMPLE

The structure shown in figure 2 is considered. All structural elements are assumed to have a rectangular cross-section. The elements are divided into four groups, see table 1. The $N = 9$ design variables have initial values, lower and upper bounds: $b_i = 0.5$ m, $b_i^l = 0.3$ m, $b_i^u = 0.6$ m, $i=1,3,5,7,8$ and $b_i = 0.02$ m, $b_i^l = 0.01$ m, $b_i^u = 0.04$ m, $i=2,4,6,9$.

group	elements	width	height	thickness
1	1,4,7,10	b_1	b_1	b_2
2	2,5,8,11	b_3	b_3	b_4
3	3,6,9,12	b_5	b_5	b_6
4	13-21	b_7	b_8	b_9

Table 1. Structural elements.

The load P is assumed to be Weibull distributed with expected value = 0.25 MN and standard deviation = 0.0375 MN. The modulus of elasticity is modelled as a stochastic field with expected value $2.1 \cdot 10^5$ MPa and spectral density $S_{f_E}(\omega) = \frac{1}{4} \sigma_f^2 b^3 \omega^2 \exp(-b|\omega|)$, where $\sigma_f = 0.1$ and $b = 1$ m. The corresponding zero mean normally distributed stochastic variables $X_1 - X_{63}$ are defined by (12). The covariances are obtained from (14). It is assumed that the stochastic field $\{f_E(x)\}$ is independent between different structural elements.

A Serviceability Limit State (SLS) function is defined by

$$g_1 = v_{\max} - v_{4,hor} \quad (24)$$

where $v_{\max} = 0.05$ m is the maximum allowable displacement and $v_{4,hor}$ is the horizontal displacement of node 4. The minimum acceptable reliability index is $\beta_1^{\min} = 3.0$.

Ultimate Limit State (ULS) functions are defined by

$$g_i = \sigma_F - |\sigma_j| \quad i = 2, 43 \quad (25)$$

where σ_F is the yield stress which is assumed to be Log-Normal distributed with expected value = 360 MPa and standard deviation = 36 MPa. σ_j is the maximum stress in the considered element. The minimum acceptable reliability index is $\beta_i^{\min} = 4.7$.

The objective function is the volume of the structure. The optimization problem is solved using the modules described above. The result is $b_1 = 0.600$ m, $b_2 = 0.0298$ m, $b_3 = 0.600$ m, $b_4 = 0.0229$ m, $b_5 = 0.600$ m, $b_6 = 0.0210$ m, $b_7 = 0.600$ m, $b_8 = 0.600$ m, $b_9 = 0.0251$ m with volume 4.66 m³. The active constraints are ULS in elements 4, 5, 6 and 13.

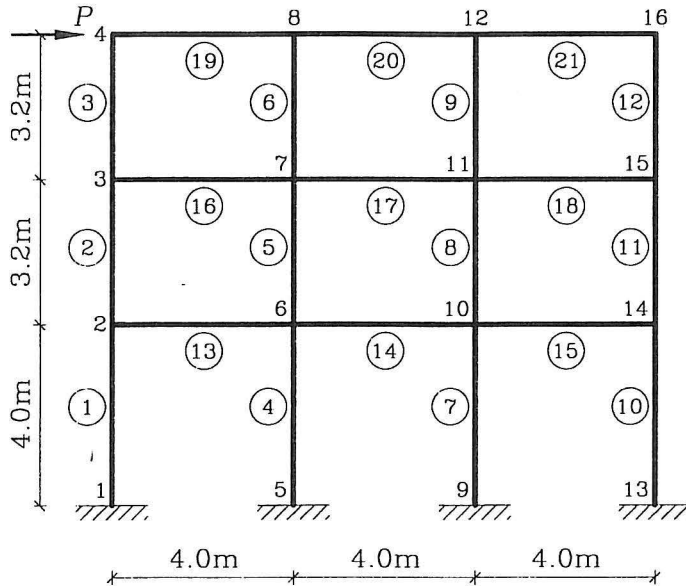


Figure 2.

7. CONCLUSIONS

It is shown how stochastic fields modelling the modulus of elasticity can be discretized in stochastic variables and how the reliability of a structural system can be estimated. Reliability-based optimization problems are formulated and sensitivity analyses are performed. A computer implementation is described where standard programmes for optimization, reliability analysis and structural analysis are coupled with special routines for stochastic finite elements and sensitivity analysis. An illustrative example is given.

8. ACKNOWLEDGEMENTS

Part of this paper is supported by the Danish Technical Research Council within the research programme on 'Safety and Reliability'.

9. REFERENCES

- Brenner, C.E. (1991). Stochastic Finite Element Methods. Report 35-91, Institute of Engineering Mechanics, University of Innsbruck.
- Deodatis, G. (1991). Weighted Integral Method. I: Stochastic Stiffness Matrix. *ASCE*,

- Journal Engineering Mechanics*, Vol. 117, No. 8, pp. 1851-1877.
- Der Kiureghian, A. & J.-B. Ke (1988). The Stochastic Finite Element Method in Structural Reliability. *Probabilistic Engineering Mechanics*, Vol. 3, No. 2.
- Enevoldsen, I. & J.D. Sørensen (1994). Reliability-Based Optimization in Structural Engineering. *Structural Safety*, Vol. 15, pp. 169-196.
- Kroon, I.B., M.H. Faber & J.D. Sørensen (1995). Reliability-Based Experiment Planning with Linear Regression Models. Proc. *OMAE-95*, Copenhagen, Denmark.
- Madsen, H.O., S. Krenk & N.C. Lind (1986). *Methods of Structural Safety*. Prentice-Hall.
- Schittkowski, K. (1986). NLPQL: A FORTRAN Subroutine Solving Constrained Non-Linear Programming Problems. *Annals of Operations Research*.
- Sørensen, J.D. (1991). PRADSS: Program for Reliability Analysis and Design of Structural Systems. Aalborg University.
- Sørensen, J.D., P. Thoft-Christensen, A. Siemaszko, J.M.B. Cardoso & J.L.T. Santos, (1994). Interactive Reliability-Based Optimal Design. Proc. 6th IFIP WG7.5, Assisi, Italy, Chapman & Hall.
- Sørensen, J.D., M.H. Faber & I.B. Kroon (1995). Optimal Reliability-Based Planning of Experiments for POD Curves. Proc. *ISOPE-95*, The Hague, The Netherlands.

STRUCTURAL RELIABILITY THEORY SERIES

PAPER NO. 125: H. I. Hansen, P. H. Kirkegaard & S. R. K. Nielsen: *Modelling of Deteriorating RC-Structures under Stochastic Dynamic Loading by Neural Networks*. ISSN 0902-7513 R9409.

PAPER NO. 126: H. U. Köylüoğlu, S. R. K. Nielsen & A. Ş. Çakmak: *Reliability Approximations for MDOF Structures with Random Properties subject to Random Dynamic Excitation in Modal Subspaces*. ISSN 0902-7513 R9440.

PAPER NO. 127: H. U. Köylüoğlu, S. R. K. Nielsen and A. Ş. Çakmak: *A Faster Simulation Method for the Stochastic Response of Hysteretic Structures subject to Earthquakes*. ISSN 0902-7513 R9523.

PAPER NO. 128: H. U. Köylüoğlu, S. R. K. Nielsen, A. Ş. Çakmak & P. H. Kirkegaard: *Prediction of Global and Localized Damage and Future Reliability for RC Structures subject to Earthquakes*. ISSN 0901-7513 R9426.

PAPER NO. 129: C. Pedersen & P. Thoft-Christensen: *Interactive Structural Optimization with Quasi-Newton Algorithms*. ISSN 0902-7513 R9436.

PAPER NO. 130: I. Enevoldsen & J. D. Sørensen: *Decomposition Techniques and Effective Algorithms in Reliability-Based Optimization*. ISSN 0902-7513 R9412.

PAPER NO. 131: H. U. Köylüoğlu, S. R. K. Nielsen & A. Ş. Çakmak: *Approximate Forward Difference Equations for the Lower Order Non-Stationary Statistics of Geometrically Non-Linear Systems subject to Random Excitation*. ISSN 0902-7513 R9422.

PAPER NO. 132: I. B. Kroon: *Decision Theory applied to Structural Engineering Problems*. Ph.D.-Thesis. ISSN 0902-7513 R9421.

PAPER 133: H. U. Köylüoğlu, S. R. K. Nielsen & A. Ş. Çakmak: *Stochastic Dynamics of Nonlinear Structures with Random Properties subject to Random Stationary Excitation*. ISSN 0902-7513 R9520.

PAPER NO. 134: H. U. Köylüoğlu, S. R. K. Nielsen & A. Ş. Çakmak: *Solution of Random Structural System subject to Non-Stationary Excitation: Transforming the Equation with Random Coefficients to One with Deterministic Coefficients and Random Initial Conditions*. ISSN 0902-7513 R9429.

PAPER NO. 135: S. Engelund, J. D. Sørensen & S. Krenk: *Estimation of the Time to Initiation of Corrosion in Existing Uncracked Concrete Structures*. ISSN 0902-7513 R9438.

PAPER NO. 136: H. U. Köylüoğlu, S. R. K. Nielsen & A. Ş. Çakmak: *Solution Methods for Structures with Random Properties subject to Random Excitation*. ISSN 0902-7513 R9444.

PAPER NO. 137: J. D. Sørensen, M. H. Faber & I. B. Kroon: *Optimal Reliability-Based Planning of Experiments for POD Curves*. ISSN 0902-7513 R9455.

PAPER NO. 138: S.R.K. Nielsen & P.S. Skjærbæk, H.U. Köylüoğlu & A.Ş. Çakmak: *Prediction of Global Damage and Reliability based upon Sequential Identification and Updating of RC Structures subject to Earthquakes*. ISSN 0902-7513 R9505.

STRUCTURAL RELIABILITY THEORY SERIES

PAPER NO. 139: R. Iwankiewicz, S. R. K. Nielsen & P. S. Skjærbæk: *Sensitivity of Reliability Estimates in Partially Damaged RC Structures subject to Earthquakes, using Reduced Hysteretic Models*. ISSN 0902-7513 R9507.

PAPER NO 141: H. U. Köylüoğlu, S. R. K. Nielsen & A. Ş. Çakmak: *Uncertain Buckling Load and Reliability of Columns with Uncertain Properties*. ISSN 0902-7513 R9524.

PAPER NO. 142: S. R. K. Nielsen & R. Iwankiewicz: *Response of Non-Linear Systems to Renewal Impulses by Path Integration*. ISSN 0902-7513 R9512.

PAPER NO. 145: H. U. Köylüoğlu, S. R. K. Nielsen, Jamison Abbott and A. Ş. Çakmak: *Local and Modal Damage Indicators for Reinforced Concrete Shear Frames subject to Earthquakes*. ISSN 0902-7513 R9521

PAPER NO. 146: P. H. Kirkegaard, S. R. K. Nielsen, R. C. Micaletti and A. Ş. Çakmak: *Identification of a Maximum Softening Damage Indicator of RC-Structures using Time-Frequency Techniques*. ISSN 0902-7513 R9522.

PAPER NO. 147: R. C. Micaletti, A. Ş. Çakmak, S. R. K. Nielsen & P. H. Kirkegaard: *Construction of Time-Dependent Spectra using Wavelet Analysis for Determination of Global Damage*. ISSN 0902-7513 R9517.

PAPER NO. 148: H. U. Köylüoğlu, S. R. K. Nielsen & A. Ş. Çakmak: *Hysteretic MDOF Model to Quantify Damage for TC Shear Frames subject to Earthquakes*. ISSN 1395-7953 R9601.

PAPER NO. 149: P. S. Skjærbæk, S. R. K. Nielsen & A. Ş. Çakmak: *Damage Location of Severely Damaged RC-Structures based on Measured Eigenperiods from a Single Response*. ISSN 0902-7513 R9518.

PAPER 151: H. U. Köylüoğlu & S. R. K. Nielsen: *System Dynamics and Modified Cumulant Neglect Closure Schemes*. ISSN 1395-7953 R9603.

PAPER NO. 154: J. D. Sørensen, M. H. Faber, I. B. Kroon: *Optimal Reliability-Based Planning of Experiments for POD Curves*. ISSN 1395-7953 R9542.

PAPER NO. 155: J. D. Sørensen, S. Engelund: *Stochastic Finite Elements in Reliability-Based Structural Optimization*. ISSN 1395-7953 R9543.

PAPER NO. 161: S. Engelund, J. D. Sørensen: *Stochastic Models for Chloride-initiated Corrosion in Reinforced Concrete*. ISSN 1395-7953 R9608.

Department of Building Technology and Structural Engineering
Aalborg University, Sohngaardsholmsvej 57, DK 9000 Aalborg
Telephone: +45 98 15 85 22 Telefax: +45 98 14 82 43